

NEPTUNE 4500 INDICATOR

CHECKWEIGH DIGITAL INDICATORS



Ultra simple two button operation makes the NEPTUNE-4500 indicator ideal for repetitive portion control, chemical processing and many other applications. This indicator is built tough to meet the demanding requirements of harsh conditions for tough washdown environments and corrosive chemical industries. Polished, 304 stainless steel construction provides high durability and a long term attractive sanitary appearance. With plenty of power to drive four 350 ohm load cells and full duplex serial RS-232 serial communication, the Neptune 4500 offers maximum simplicity and value.

NEPTUNE 4500 INDICATOR

CHECK WEIGH DIGITAL INDICATOR

STANDARD FEATURES & BENEFITS

*** HIGH SPEED OPERATIONS:**

At thirty updates per second, zero to target and back to zero ensures maximum throughput and productivity

*** BRIGHT GREEN LED:**

0.56" Green LED allows the operator to tell at a glance the weight reading.

*** RUGGED NEMA 4X 304 STAINLESS STEEL ENCLOSURE**

*** NTEP pending**

*** TWO BUTTON OPERATION:**

Easy 2 button operation allows the operator to quickly become familiar with the scale operation.

*** FOUR UNITS OF MEASURE:**

Pushbutton select to read in pounds, ounces, pounds and ounces, kilograms and simple piece counting.

*** SERIAL COMMUNICATION PORT**

Communications with peripherals is made easy utilizing the full Bi-Directional RS-232 serial communication feature.

Specifications:

Construction: Type 304 Stainless Steel to NEMA 4X Standard

Power Requirements: 117 VAC - 50/60 Hz at 0.5 Amp

Optional: Line power 220 VAC - 50/60 Hz at 0.25 Amp

Excitation Voltage - +10VDC, 4 x 350 ohm load cells

Display: 6 Digits Plus Sign, .56" High, 7 Segment Light Emitting Diode Display

Display Update Rate: 8 Per Second

Displayed Resolution: 500 - 50,000 displayed counts


Operating Temperature: -10°C to 40°C (14°F to 104°F)

Operating Temperature: 14°F to 104°F (-10°C to 40°C)


Overall dimensions: 8.75" x 3" x 4.6"

Keypad symbols - stable, zero, lb, kg, lb/oz, oz, zero, pcs

Warranty: 1 Year Warranty

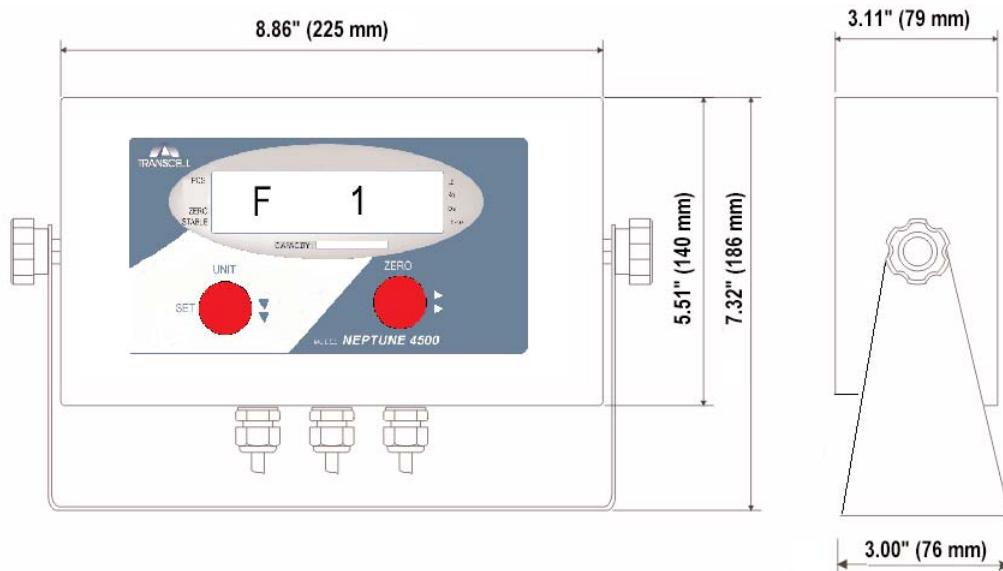

YOUR AUTHORIZED TRANSCELL DEALER IS:



Specifications and features subject to change without notice.
REV 5-15-03



TRANSCELL TECHNOLOGY, INC.

975 Deerfield Pkwy, Buffalo Grove, IL 60089

Tel (847) 419-9180 Fax (847) 419-1515

(800) 503-9180

www.transcell.net