


NEPTUNE 6500 INDICATOR

CHECKWEIGH DIGITAL INDICATORS



The NEPTUNE-6500 indicator is built tough to meet the demanding requirements of harsh conditions for tough washdown environments and corrosive chemical industries. Under - Accept - Over annunciators make high speed check weighing easy. A beeper is included standard to add versatility. Large easy-to-read, bright green, one inch tall digits ensure maximize operator visibility and minimize fatigue while maintaining high product throughput. Polished, 304 stainless steel construction provides high durability and a long term attractive sanitary appearance. A full numeric keyboard and 100 part number memory for set point data make this indicator the leader in check weighing value.

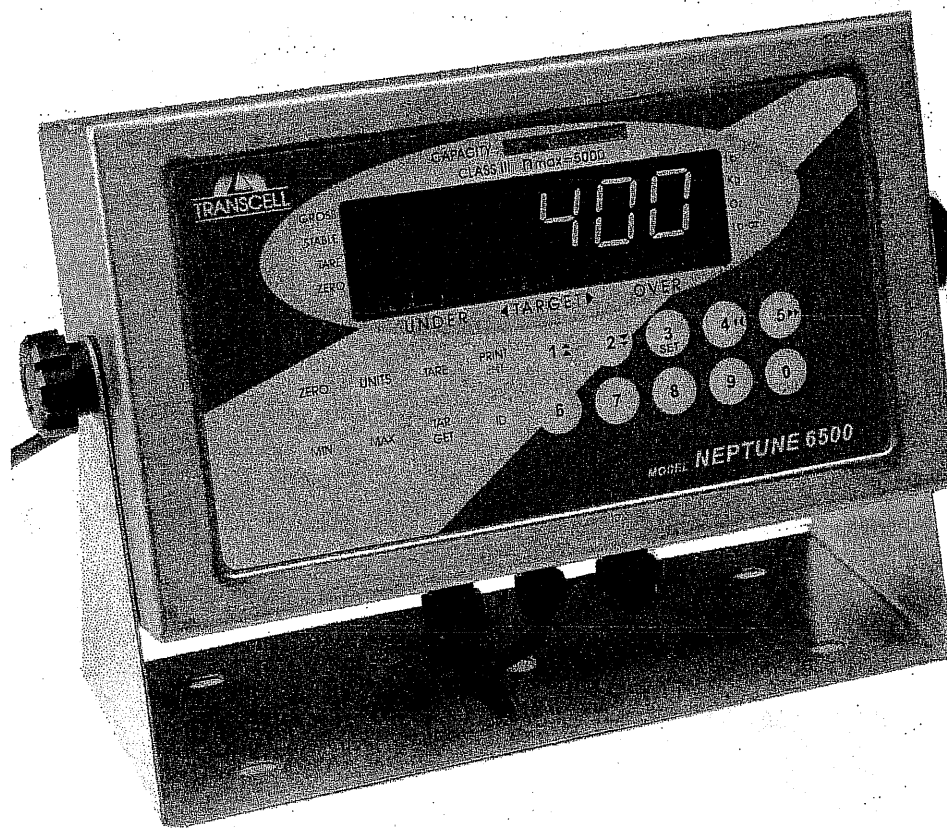

TRANSCCELL TECHNOLOGY, INC.

NEPTUNE 6500 INDICATOR

CHECK WEIGH DIGITAL INDICATOR

STANDARD FEATURES & BENEFITS

▷ HIGH SPEED OPERATIONS:

At thirty updates per second, zero to target and back to zero ensures maximum throughput and productivity

▷ **Four units of measure:** pushbutton select to read in pounds, ounces, pound-ounce, kilograms

▷ **Check weigh annunciators:** amber/under, green/accept, red/over

▷ **Internal beeper for audible alert**

▷ **Full numeric keypad and 100 part number memory** allows storage of 6 digit part number with setpoint data for fast and easy switching between products

▷ **Serial RS232C Data Output:** This bi-directional port is switchable for interface to a printer, remote display or computer at 1200-9600 baud

▷ **Complete Print Format:** Contains gross weight, OVER or UNDER indication, time, date and ticket number

▷ **Time and Date Memory Standard**

▷ **Digital Keyboard Calibration**

▷ **1 Year Warranty**

▷ **3 - 5 Volt TTL Setpoint Outputs**

Specifications:

Load Cell Excitation: +10 VDC

Load Cell Current: Drives up to four 350Ω Load Cells

Display Update Rate: 8 Per Second

A/D Resolution: Up to 260,000 Internal Counts

Display: 6 Digits Plus Sign, 1" High, 7 Segment Light Emitting Diode Display

Display Resolution: Up to 50,000 External Grads, Selectable

Key Functions: Units, Zero, Net/Gross, Tare, Print

Serial Port: Full Duplex RS-232 Format

Annunciators: Gross, Net, kg, lb, Center of Zero, Stable, Tare, Negative, PCS

Power Requirements: 117 VAC - 50/60 Hz at 0.5 Amp


- Optional: Line Power 220 VAC - 50/60 Hz at 0.25 Amp

DC Power Consumption: 200 mA + 30 mA/350Ω Load Cell


Operating Temperature: 14°F to 104°F (-10°C to 40°C)

Overall dimensions: 10" x 3" x 6"

Warranty: 1 Year Warranty

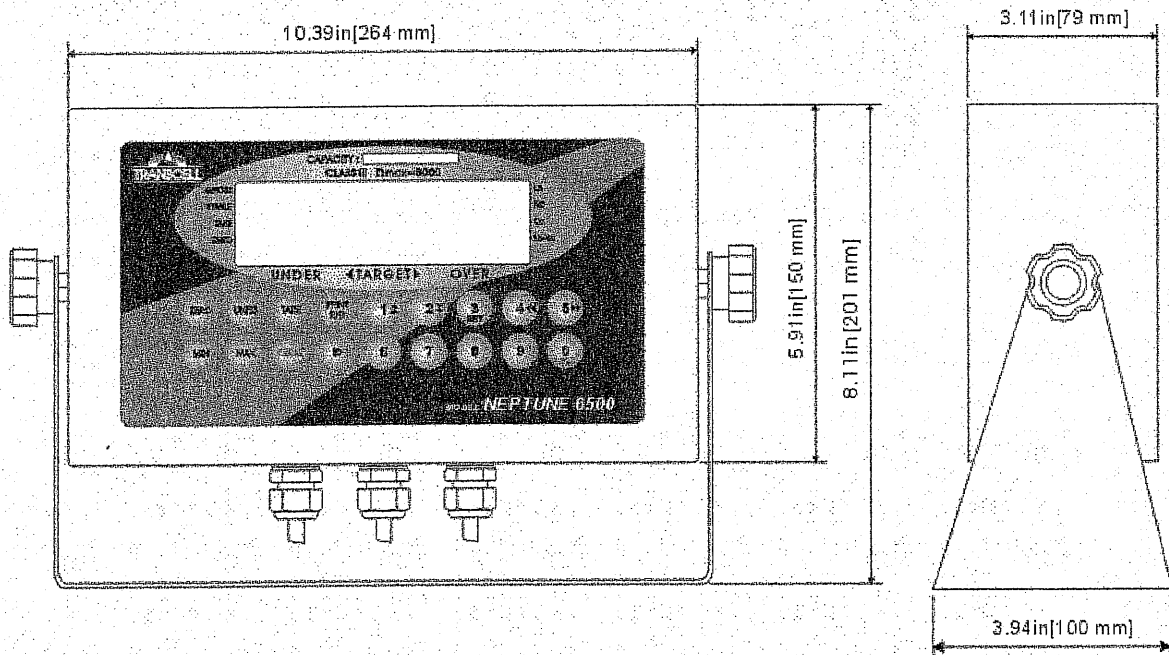

YOUR AUTHORIZED TRANSCELL DEALER IS:

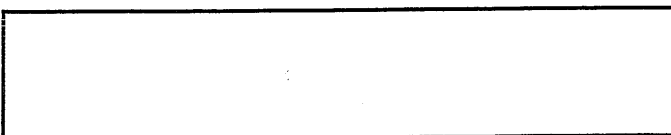

TRANSCELL TECHNOLOGY, INC.

975 Deerfield Pkwy, Buffalo Grove, IL 60089

Tel (847) 419-9180 Fax (847) 419-1515

(800) 503-9180