



COUNTING SCALE

This economical high resolution counting scale is designed with simplicity in mind. In less than a minute, operators are easily familiar with standard operation. Performance is enhanced by utilizing over 300,000 internal counts and the vibration resistance feature helps the TCS3T to continually make accurate measurements even when used in a disturbed environment.



TCS3T

Standard Features & Benefits:

- **20 KEY NUMERIC KEYPAD-**
The 20 key membrane panel allows entry of numeric data, such as known tare values, APW'S, and specific sample sizes from 1 to 99,999
- **OPERATES FROM RECHARGEABLE BATTERY OR AC POWER CORD**
- **TARGET FUNCTION** (High limit value)
- **PRESET TARE** (Up to 10 weights)
- **STATIC OVERLOAD PROTECTION**
- **THREE LARGE BACKLIT LCD'S-** displays simultaneously show Gross Weight, Unit Weight, and Piece Count
- **1:300,000 INTERNAL RESOLUTION-**
High internal resolution provides greater sensitivity, for increased counting accuracy and weighments
- **ACCUMULATOR FUNCTION-**
Can accumulate either pieces or weight, and print total.
- **RS 232 PORT-** Connect to serial printer
- **VIBRATION RESISTANCE**
- **PRESET UNIT WEIGHT** (Up to 10 weights)
- **CHARGING INDICATOR**
- **LOW BATTERY INDICATOR**
- **AUDIBLE FEEDBACK**

Specifications:

| |
|---|
| Displays: 5-1/2, 7-Segment, 7 annunciators LCD with LED backlight 6-digit, 7 segment, 4 annunciators LCD with LED backlight |
| Counting Capacity: 99,999 |
| Weighing Resolution: 1:30,000 (Max) |
| Units of Measure: lb / kg |
| Operating Temperature: 32°F to 104°F (0°C to 40°C) |
| Power Requirements: AC115V, 60 Hz 6VDC, 4mA AH rechargeable battery included |
| Housing: Ivory ABS |
| Sub Platform: Metal |
| Platform: ABS with stainless shroud |
| Feet: Non-Skid Hard Rubber |
| Net Weight: 8.85 lb (4.0 kg) |
| Shipping Weight: 11.1 lb (5.0 kg) |
| Battery Life: 150 hrs (continuous) |
| Recharge Time: 8 hrs |
| Min. Sampling Weight: 1.5 d |
| Min. Unit Weight: 0.8 d |
| Warranty: 1 Year Limited Warranty |



Model:

| | |
|--------------------|--------------------------------------|
| TCS3T-6 lb | 6 lb x 0.0002 lb (3 kg x 0.0001 kg) |
| TCS3T-12 lb | 12 lb x 0.0005 lb (6 kg x 0.0002 kg) |
| TCS3T-30 lb | 30 lb x 0.001 lb (15 kg x 0.0005 kg) |
| TCS3T-60 lb | 60 lb x 0.002 lb (30 kg x 0.001 kg) |

Capacities:

Dimensions:

| |
|--|
| Scale Dimension: 13.5" x 11.8" x 3.9" (343 mm x 300 mm x 99 mm) |
| Platter Dimension: 11" x 9" (280 mm x 232 mm) |
| Packaging Dimension: 15.6" x 13.8" x 6.5" (395 mm x 350 mm x 165 mm) |

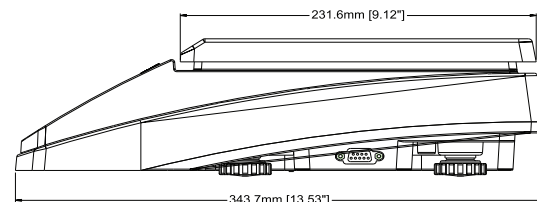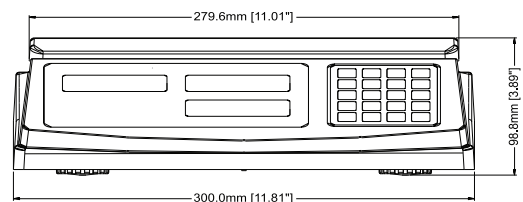

Version 1.4, 10/07/08

YOUR AUTHORIZED TRANSCELL DEALER IS:

Specifications and features subject to change without notice.



TRANSCELL TECHNOLOGY, INC.

975 Deerfield Pkwy, Buffalo Grove, IL 60089
Tel (847) 419-9180 Fax (847) 419-1515

(800) 503-9180

www.transcell.net