


Column Type

Column Type




Capacities

10t, 20t, 30t, 50t

Features

- Digital Load Cell
- Multi-column load cell
- Total stainless steel construction
- Hermetically sealed
- Easy to install
- High accuracy
- High stability
- Suitable for truck scales, etc.

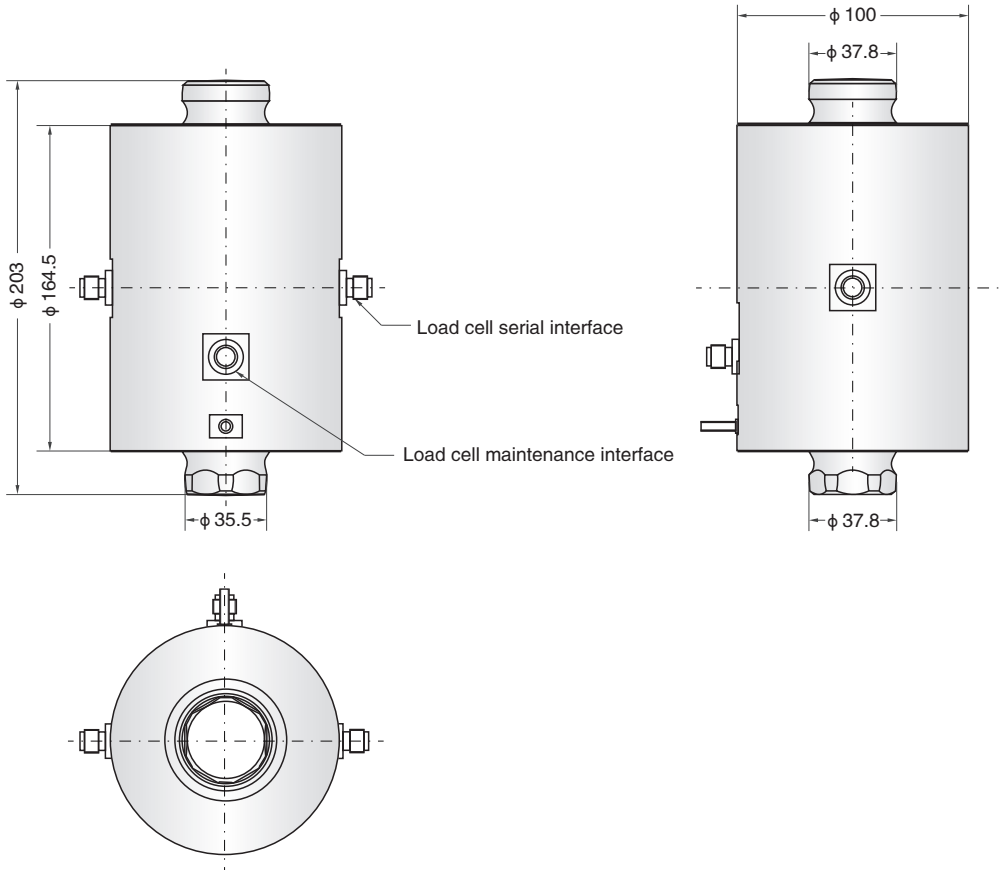

Specifications			
Zero Balance	±1.5% of rated output	Operating temperature range	-10°C - +40°C
Class of accuracy	C3, C6	Load cell number range	1-10
Data transmission	RS485 interface with 2 wires Dual communication	Safe Overload	150%
Communication protocol	Trancell definition	Insulation Resistance	≥2000 M ohm (50V DC)
Data refresh frequency	80HZ/S	Rated Excitation	9-12V
Rate of data signalling	57600BPS	Protection grade	IP68