


## Single Point



Maximum platform: 24"X24"


### Capacities

150kg,200kg, 250kg, 300kg, 500kg,635kg,1000kg

### Features

- Single Point Load Cell
- Easy to Install
- Stable & Reliable
- Senior Aluminum
- Fit for Floor scales,Tank weighing,Bin and hopper scales,etc.

### Schematic

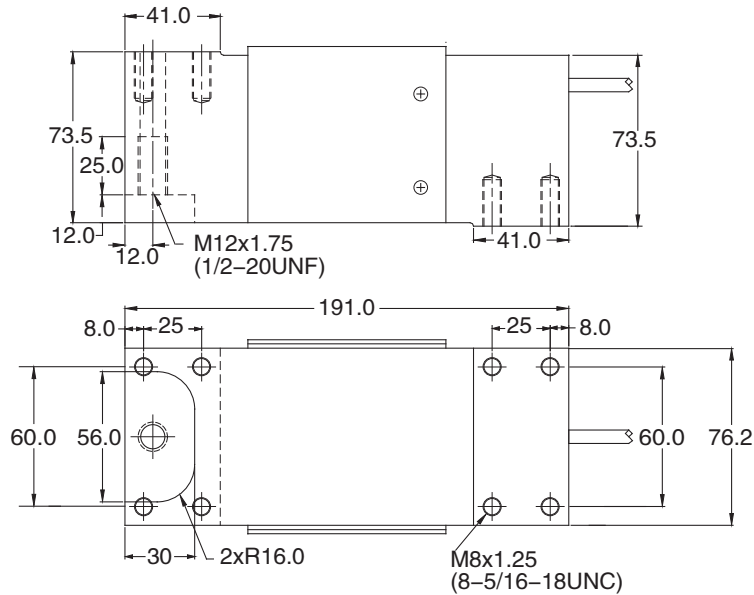

### Specifications

Rated Output	2.0mV/V ±10%	Safe Temp. Range	-10°C to + 70°C
Zero Balance	±3% of rated output	Temp. Compensated	-10°C to + 40°C
Creep after 20 minutes	±0.03% of rated output	Safe Overload	150%
Nonlinearity	±0.03% of rated output	Input Impedance	410 ohm ±20 ohm
Hysteresis	±0.03% of rated output	Output Impedance	350 ohm ± 5 ohm
Repeatability	±0.03% of rated output	Insulation Resistance	≥5000 M ohm(50V DC)
Temp. effect on output	0.002% of applied output/°C	Rated Excitation	10V DC/AC
Temp. effect on zero	0.002% of rated output/°C	Maximum Excitation	15V DC/AC
Cable Length	20feet	Wire Material	Red(+E) Black(-E) White(-S) Green(+S)